

FEATURES

- Passive cooling design
- Low cost fanless system possible.
- High efficiency Power supply

Ordering Guide

Chassis Name	KM 261U+Plug in P/S
Vesa Mounting Kits	VM 75100


General

Construction	Heavy duty steel, SGCC
Color	Black
Driver Bays	Internal: 2 x 2.5" HDD
LED Indicators	Power, HDD, LAN/Bluetooth
Switch/ IO	Power on/off x 1; 2 x USB 2.0
Ventilation	Passive cooling
Mainboard	Mini ITX 170 x 170 mm mainboard
Power	Efficiency > 90% , 60W output, Plug in ATX P/S
Mounting	<ul style="list-style-type: none"> ● Desktop, wall mount (Standard, WMK261) ● Vesa mount (option; VM75100)
Weight	Net 1.4 kgs, Gross 1.82 kgs
Dimension	W192 x D 261 x H 62 mm
Carton & packing	5 inner boxes in one outside carton, 5 ply export carton (W500 x D330 x H310 mm, 1.81 CBF), PE Foam system packing

Enviroment

Operating Temp. Range	0 °C ~ 50 °C (32 ° F ~ 122 ° F)
Storage Temp. Range	- 20 °C ~ 80 °C (-4 ° F ~ 176 ° F)
Relative Humidity	5 % ~ 95 % , non-condensing
Vibration	5 ~ 7 Hz : 0.5 "double amplitude displacement" 7 ~ 2000 Hz : 1.5 g acceleration

Mechanical Drawing

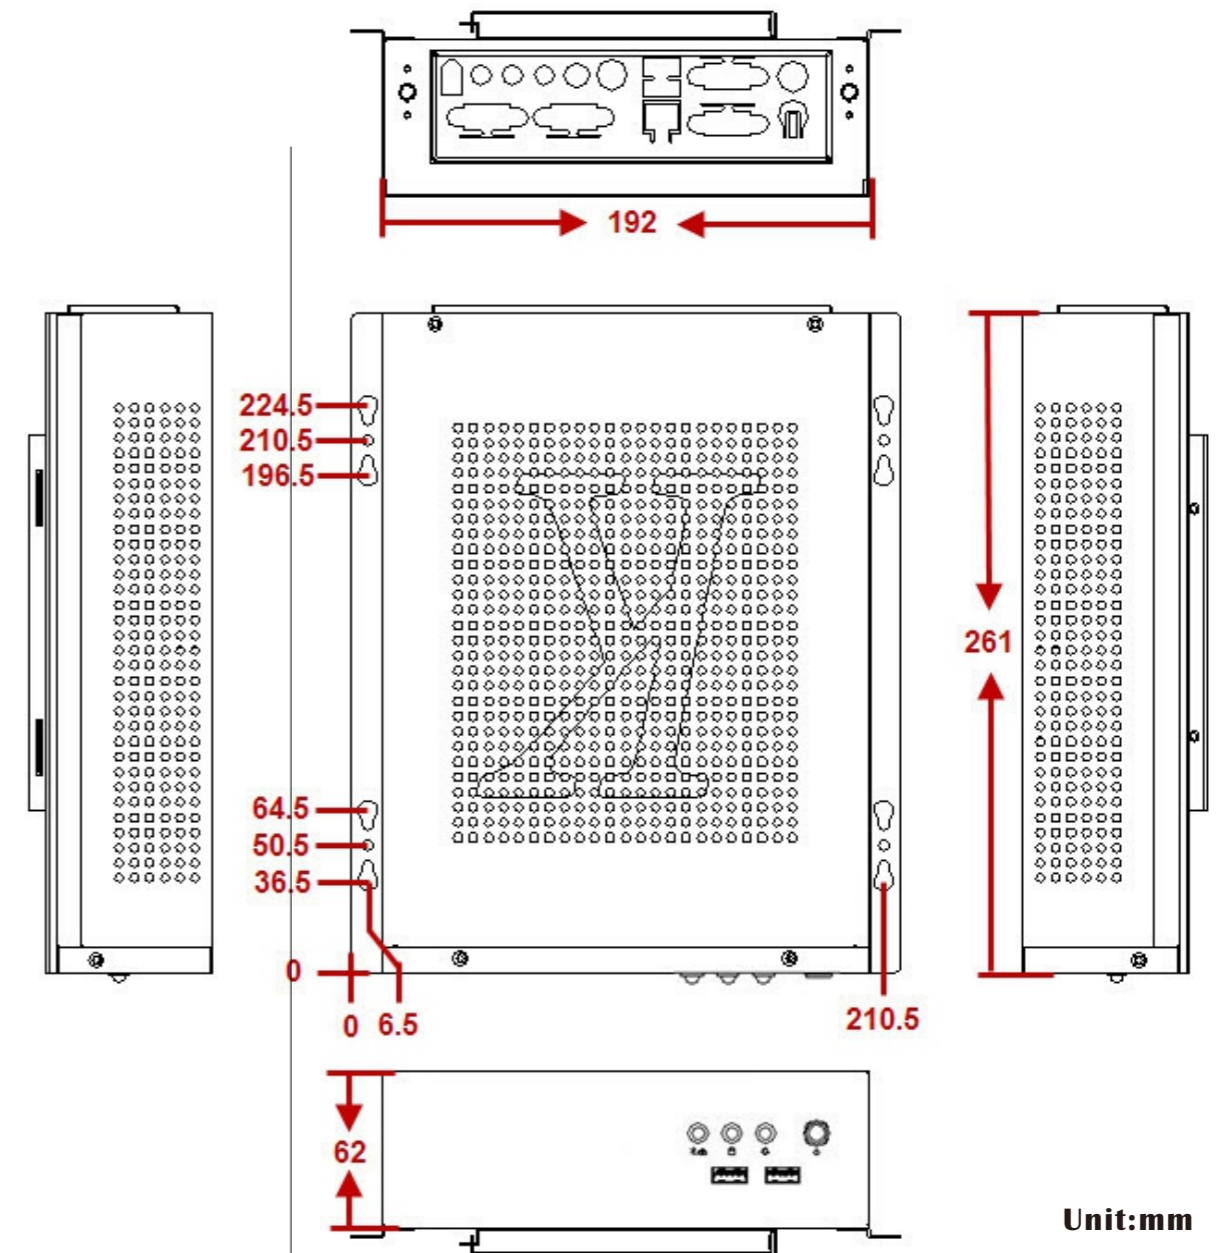

Unit:mm